

Heat can be this good.

Kermi design radiators for the bath- and living room world.



Design radiators



Technical specifications subject to change. We assume no liability for mistakes or printing errors. Product images depict model versions; imaged accessories are items not included in the scope of delivery. Colour deviations between printed and original colours are unavoidable for technical reasons. The General Terms and Conditions of Kermi GmbH apply.

Kermi is a registered trademark.

© by Kermi GmbH, Pankofen-Bahnhof 1, 94447 Plattling, Germany

The product including all its parts is protected by copyright. Any exploitation outside the narrow confines of the copyright law is impermissible and liable to prosecution without the prior consent of the copyright holder. This includes reproductions, translations, microfilming and storage and processing in electronic systems.

Date: March 2015

Kermi design radiators

Heat can be this good. Kermi design radiators for the bath- and living room world.

Competence comes from Kermi	2
Heating design with charisma	4
Top quality that convinces every day	6
Innovation as a task	8
Ideos	10
Tabeo	14
Credo-Duo	18
Credo-Half	20
Icaro	22
Diveo	24
Credo	26
Casteo	30
Credo-Uno	34
Duett	36
Geneo quadris	40
Geneo circle	42
Basic-50	44
B20	50
Karotherm	52
Pateo	54
Rubeo	56
Kermi Decor	58
Design radiator programme overview	62
Design radiator accessories overview	68
What you should know	66
The correct heat output	68
Connection possibilities and radiator position	70
Pleasant heat whenever needed. Electric auxiliary heating or all-electric operation	72
Easy replacement during renovation	74
Towel heating. Accessories	76
Noble heating aesthetics with exclusive charisma	78
Fresh colours for the heating world	80

Competence comes from Kermi.

Simply relax – with the safety of a strong brand.



Kermi provides quality of life, comfort and freshness. This is based on a unique competence and the know-how of 50 years of specialist experience. As a member company of AFG Arbonia-Forster-Holding AG with its headquarters in Lower Bavaria, Kermi is one of the leading manufacturers of heating technology and shower enclosures in Europe. With approximately 1300 highly qualified employees, latest technology and the explicit aim of delivering trend-setting design, top quality, functionality, comfort and dependability in perfect harmony. „High Quality. Made in Germany.“ For a completely comfortable home. The high standards extend to exceptional service and a clear distribution structure – Kermi radiators are only available from your qualified heating and plumbing specialist.








Heating design with charisma.

Individual design in perfect harmony with the modern bathroom and architecture for sophisticated living.

Design by Kermi. For the love of perfect forms. And with dedication to optimal function. Kermi design radiators thus create heating aesthetics for a living without stiff conventions. With forms that redefine heat. With simple clarity or extravagant heat sculpture. And not by chance honoured by major awards for design time and time again. So that you enjoy your radiator today as you will tomorrow. And the day after tomorrow.

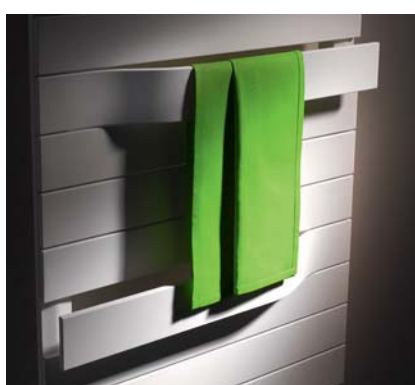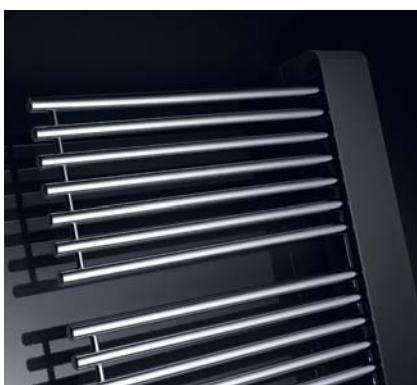

Top quality that convinces every day.

There are many reasons to make no compromise on quality. The most important thing for us: satisfied customers and products with convincing functionality and longevity.

Quality by Kermi. Not only because it is our highest priority for all products and services but also because our high demand for quality is part of our company philosophy. As a part of our daily common tasks. Kermi sets a high standard of quality beginning with product development through the selection of material and strict testing to

a demanding final inspection. Consistently and passionate. So that our products are exactly what you expect them to be. Guaranteed by international seals of quality and certified by an uncompromising quality assurance system.





RAL quality logo
guarantees highest quality




Heat output according
to European standard
DIN EN 442



Solid product quality in
accordance with EN 442.



Quality assurance system
according to
DIN EN ISO 9001:2008
Environmental management
in accordance with
DIN EN ISO 14001:2004
Energy management system
in accordance with
DIN EN ISO 50001:2011

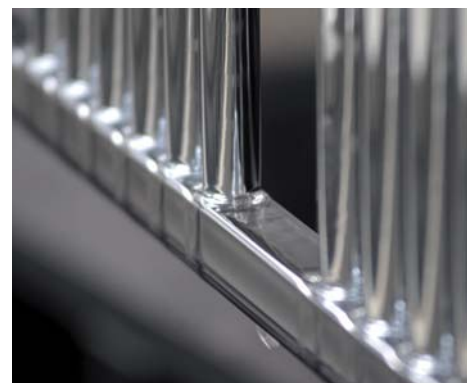

Innovation as a task.

Heat and comfort are age-old needs. It is therefore even more important to meet those needs with new dynamics – for the best combination of form and function.



Pure aesthetics with completely hidden technology. Open at the side for optimal, convenient towel warming comfort.




Easy-to-plan centre connection and complete connection situation, perfectly integrated under characteristic panel design.

Distinctively typical, the Credo wall elbow connections. The innovative fixing system is hidden underneath.



Trendsetting heat design based on unique and distinctive elementary construction. Consequently figured out to the last detail.

Innovative design in highest consistency. The dynamic towel rails can easily hold towels.

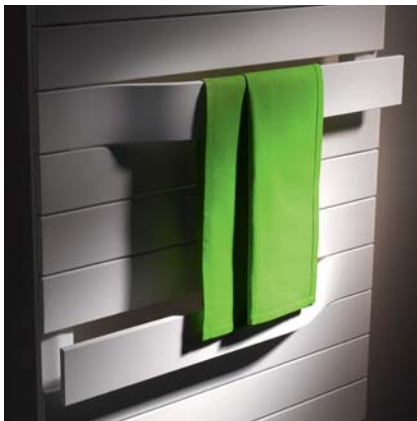

The innovative x-link connecting set forms the ideal link between bathroom radiator and underfloor heating. Invisibly integrated below the radiator panel.

Innovation made by Kermi. Whether revolutionary technology for energy-saving heat distribution or award-winning heat design ideas for unique multi-functionality – at Kermi, innovation is a tradition. As continuous optimisation process from development to installation. And as a pacesetter to find solutions for every new challenge. So that heat and comfort will always be an exciting and pleasant feeling for you.

Ideos. Radiant brilliance, sophisticated transparency.


Unique, distinctive heating design in elementary construction.

Ideos. More than one idea ahead.

- Unique, unmistakable warmth design in elementary construction.
- Ideos standard version with connections on the side.
- Ideos-V with integrated valve fitting and 50 mm connection, on the side or centred for maximum flexibility after basic installation.
- Additional electric heating option.
- Ideos-E for all-electric operation.



Extravagant heat design with comfortable additional features: harmoniously integrated accessories can be placed anywhere within the elementary system. And also extraordinary colour accents are available with Kermi's innovative colour concept (see also page 80).

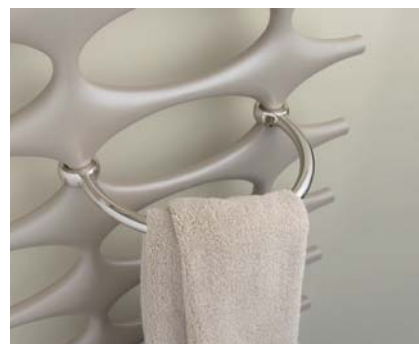


The entire connection of the Ideos-V is covered with an elegant panel. The integrated valve set provides efficient energy savings.



Technical information

Standard heights	776, 1151, 1526, 1901 mm
Heights valve version	758, 1133, 1508, 1883 mm
Lengths	508, 758 mm
Depth	37 mm
Heat output 75/65-20 °C	262 - 963 Watt

Unique, distinctive design in elementary construction.
A brilliant heating object even in the standard version
with visible connections.

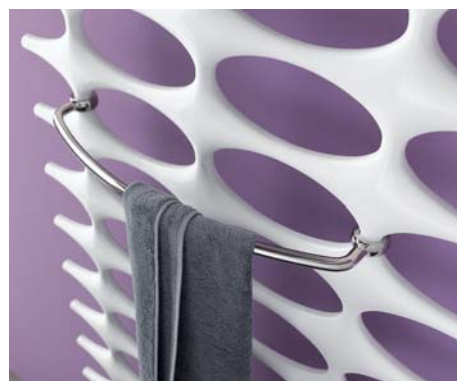

Extravagant heat design,
perfected with elegant
accessories: towel rails, towel
ring and towel hooks can be
placed anywhere within the
elementary system.



Central-heating independent heat for year-round: Ideos and Ideos-V for additional electric operation, and Ideos-E for all-electric operation. Equipped with the latest control technology.



Tabeo. When convincing technology becomes a mere formality.

The fusion of organically flowing shapes with puristic simplicity enriches both classical and modern domestic spaces.

Tabeo. Experience beauty and comfort combined as one.

- Short response time due to small water content.
- Blinded centre connection for maximum flexibility and planning freedom after basic installation.
- Tabeo-V with thermostatic head at user-friendly height.
- Connection to Kermi x-net floor heating possible with the x-link connecting set.
- Elegant towel rail, open at the side so that towels can be hung up easily.
- Additional electric heating option.
- Tabeo-E for all-electric operation.





Tabeo-V looks good in every room.
And it is useful, for example as holder
for tea towels and bathroom towels.



**x-link. The perfect combination
of heating design and floor heating.**

For Tabeo-V, Kermi offers the x-link
connecting set for combination with
the Kermi x-net floor heating system.
It is directly installed on the radiator
and covered completely with the panel.
For perfectly controlled comfort without
an objectionable connection box,
without a power connection and
extensive construction work.

Technical information	
Heights	1197, 1437, 1757 mm
Lengths	500, 600, 750 mm
Depth	51 mm
Heat output 75/65-20 °C	646 - 1266 Watt



Do you like it colourful? With its generous heating surfaces, the Tabeo is perfectly suited to set colour accents.



Tabeo with easy-to-plan 50-mm centre connection.



Practical: the thermostat unit for the Tabeo-V is installed at a user-friendly height, either on the left or on the right side.



Always within reach and always pleasantly warmed – the Tabeo can hold towels or clothes.

With additional electric heating or all-electric operation as Tabeo-E – the Tabeo convinces as a fascinating source of heat all year-round, independent of the central heating system.




Credo-Duo. Design consistency means high performance.

Characteristic in its appearance. Twice as effective in its performance.

Thus, maximum functionality and exclusive design are combined.

Credo-Duo. Pure heating design with dual power.

- Double pipe register for particularly high heat output.
- Centre connection for maximum planning freedom throughout.
- Connection to Kermi x-net floor heating possible with the x-link connecting set.
- Version with additional electric heating.

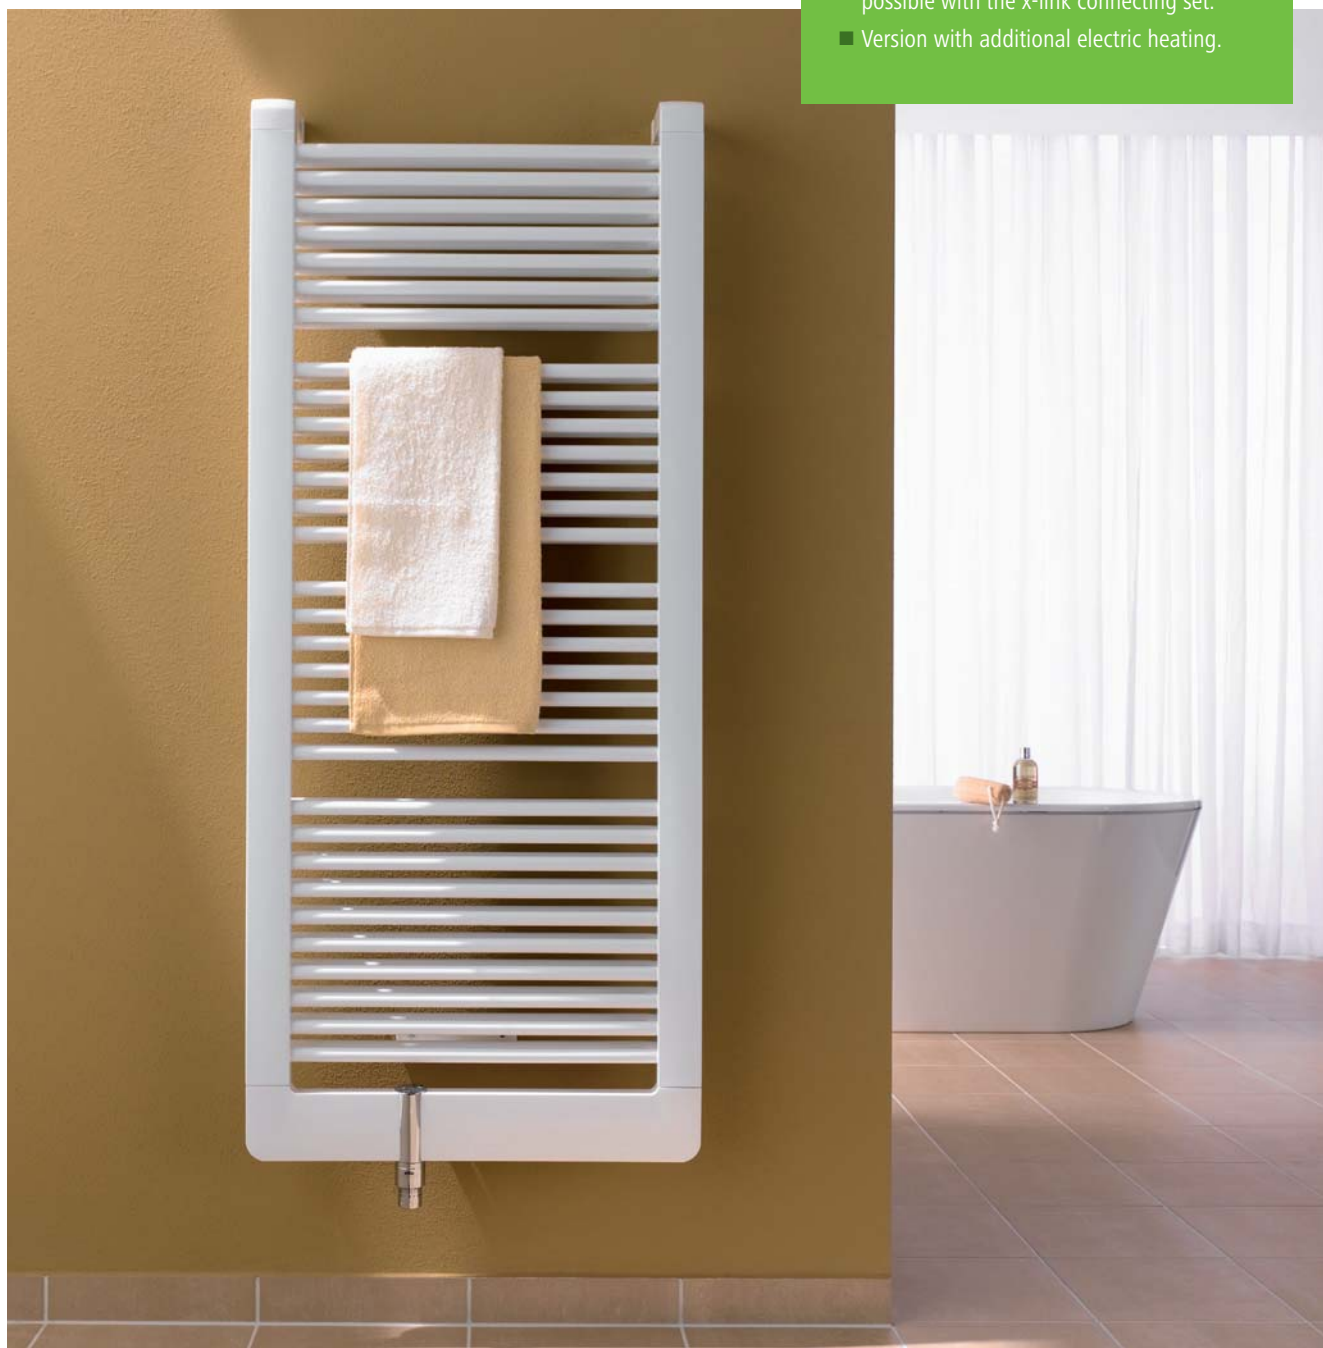



Exceptional heating design.
And enormously efficient.

This is what a radiator
can look like when perfect
appearance and high heat
output are required.
Consequently designed up to
the perfectly integrated
thermostatic head.



The additional electric heating
option permits pleasant heat all
year round. Independently of the
central heating network.



**x-link. The perfect combination
of heating design and floor heating.**

For Credo-Duo, Kermi offers the x-link
connecting set for combination with
the Kermi x-net floor heating system.
It is directly installed on the radiator
and covered completely with the panel.
For perfectly controlled comfort without
an objectionable connection box,
without a power connection and
extensive construction work.

Technical information	
Heights	1091, 1471, 1889 mm
Lengths	471, 621, 771 mm
Depth	81 mm
Heat output 75/65-20 °C	619 - 1827 Watt

Credo-Half. Fascinating form and function.

Exceptional and thereby highly comfortable.


The ideal heat solution that convinces in every way.

Credo-Half. Simply pretty and pretty comfortable.

- Left or right version available.
- 50-mm connection for maximum planning freedom throughout.
- Cross pipes open on the side in blocks, towels etc. can be comfortably hung for warming.
- Additional electric heating option.
- Credo-Half-E for all-electric operation.
- Cross pipes available in chrome.



The appealingly designed cross pipes form an attractive contrast to the plane panel design – ideal to slide in towels from the side.

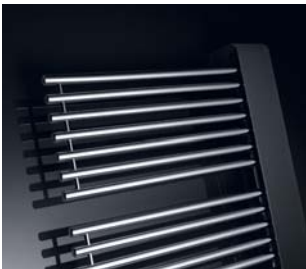

Extraordinary heat design, honoured with many design awards. The straight geometry fits the style of modern bathroom worlds.

Also available in chrome or attractive colour combinations on request (see also page 79).

With additional electric heating or as Credo-Half-E for all-electric operation. For comfortable heat all year round, also independent of the central heating system.



Technical information	
Heights	1086, 1466, 1884 mm
Lengths	460, 610 mm
Depth	51 mm
Heat output 75/65-20 °C	277 - 1051 Watt


Icaro. Swinging dynamics, exciting asymmetry.

Light and floating design harmony with a plus in heat output.

Icaro. Light and floating dynamics.

- With integrated valve set and blinded 50 mm connection for more planning flexibility.
- Pipe coil open at the side so that towels can be hung up easily.
- Radiator convertible for left or right connection.
- Additional electric heating option.
- Icaro-E for all-electric operation.
- Also available in chrome.



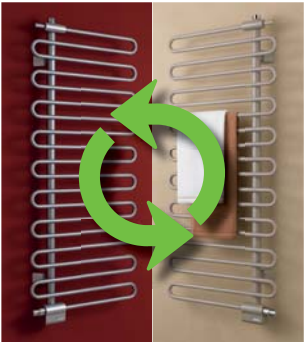

One radiator, two possibilities.
Easily and quickly convertible
for left or right version.



Exceptional design that also
provides practical comfort.
Towels can be easily slid in
from the side for example.



Noble chrome elegance
and perfectly finished surfaces
set brilliant highlights in every
sophisticated ambiance.



For comfortable heat all year
round, independent of the
central heating, the additional
electric heating option or the
Icaro-E as all-electric version.

Technical information	
Heights	1446, 1866 mm
Lengths	400, 600 mm
Depth	58 mm
Heat output 75/65-20 °C	311 - 804 Watt

Diveo. A new comfort experience for the bathroom.

And a pleasant feeling for all who enjoy beautiful things while keeping an eye on price and service.

Diveo. Functionality meets comfort.

- Left or right version available.
- Planning flexibility throughout by choosing connections either at the centre or on the side.
- Cross pipes open on the side so that towels can be hung up easily.
- Additional electric heating option.
- Diveo-E for all-electric operation.
- Available in many colours and in chrome.



The additional electric heating option or the Diveo-E version for all-electric operation provide pleasant heat all year round – independent of the central heating system.



Modern heat design with pleasant comfort. Cross pipes open on the side so that towels can be hung up easily.

Maximum freedom for interior design – connection centred, or left or right, respectively, as desired.




Technical information	
Heights	940, 1320, 1700 mm
Lengths	450, 600 mm
Depth	46 mm
Heat output 75/65-20 °C	244 - 940 Watt

Credo. Design consistency down to the detail.

Distinctive straight lines meet swinging dynamics.

Credo. Pure heating design for today's bathing environment.

- Standard version with blinded side connections.
- Credo-V with integrated valve set and blinded 50-mm centre connection for complete planning freedom throughout.
- Connection to x-net floor heating possible with x-link connection set.
- Also available with additional electric heating or as Credo-E for all-electric operation.

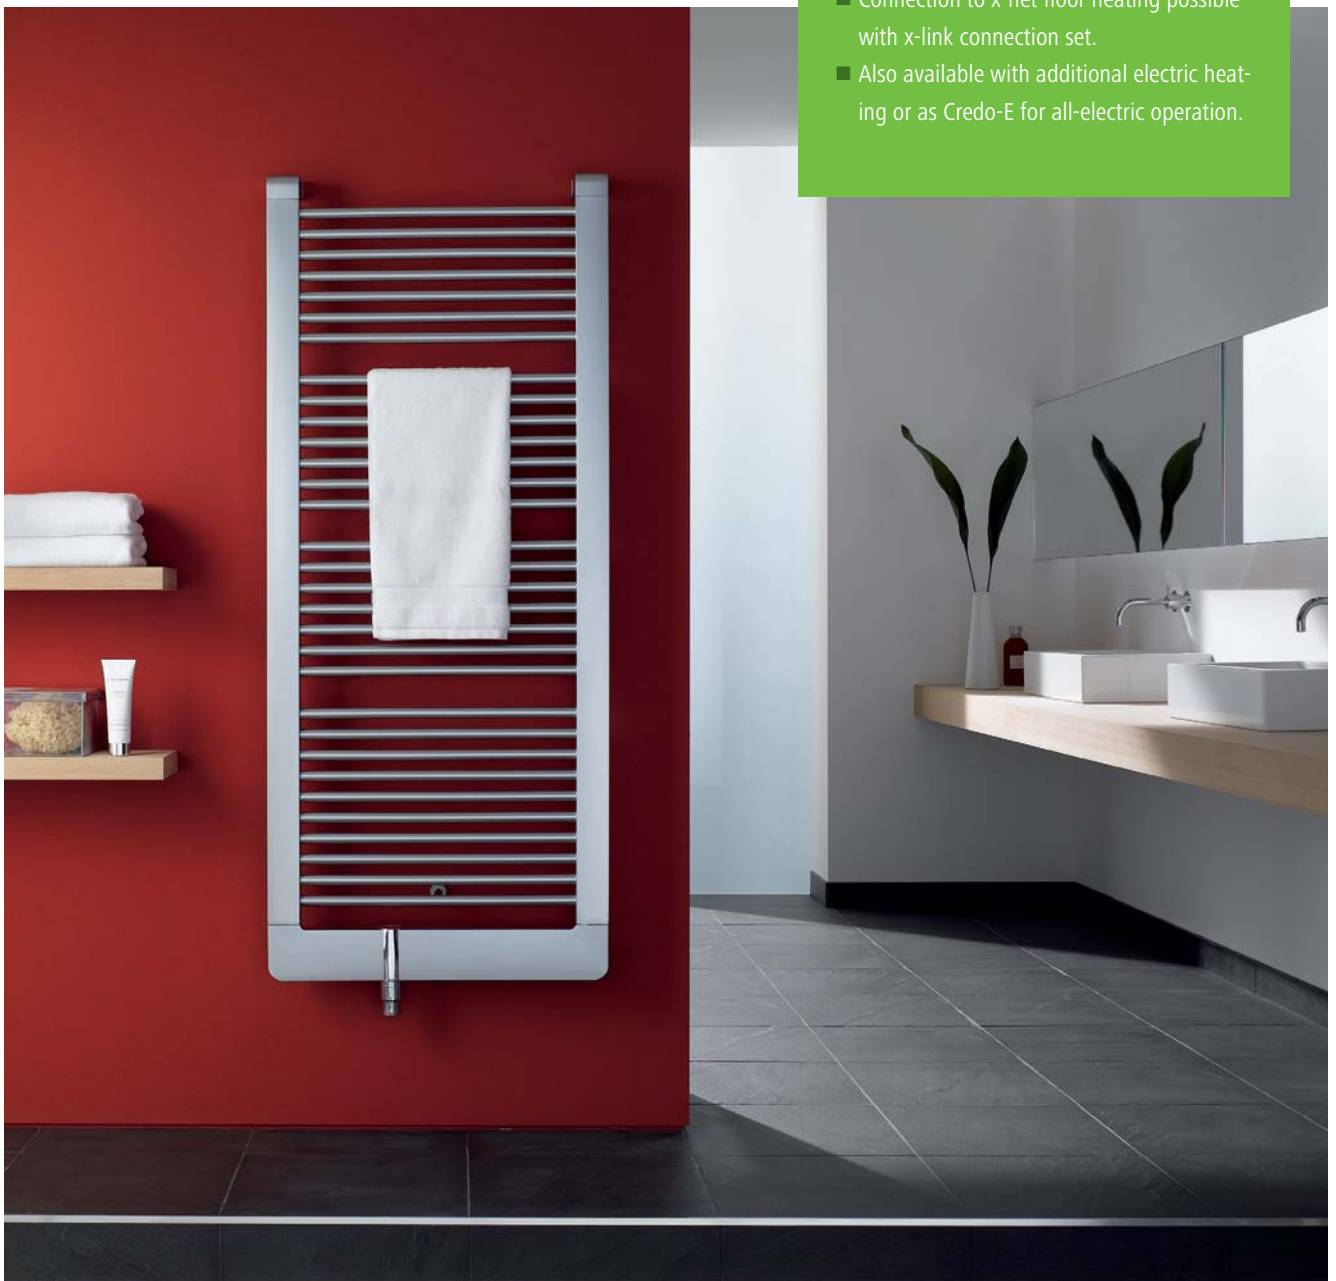



Credo-V means holistic harmony – starting with the innovative wall connection to a completely integrated, energy-saving valve set with thermostatic head.



x-link. The perfect combination of heating design and floor heating.

For Credo-V, Kermi offers the x-link connecting set for combination with the Kermi x-net floor heating system. It is directly installed on the radiator and covered completely with the panel. For perfectly controlled comfort without an objectionable connection box, without a power connection and extensive construction work.

Technical information

Standard heights	1094, 1474, 1892 mm
Heights valve version	1091, 1471, 1889 mm
Lengths	471, 621, 771 mm
Depth	35 mm
Heat output 75/65-20 °C	422 - 1240 Watt



Credo can do even more:
high-quality accessories, focused
on the minimalist shape of the
radiator.



Consequent design down to
the last detail: the distinctive
manifold pipes in exciting con-
trast to the filigree cross pipes.
A perfect match: the elegant
thermostatic head.

Comfortable heat all year round, completely independent of the central heating: in its valve and standard version, Credo offers optional additional electric operation. Or Credo-E for all-electric operation.



Casteo. The perfect combination of style and comfort.

Timeless minimalism with distinct lines. And there's a lot of delight in the simplicity of well-thought-out concepts.

Casteo. Clear lines, pure aesthetics.

- Optimal planning flexibility throughout, with a connection that can be either at the centre or on the side.
- The numerous gaps provide convenient spaces for hanging up towels.
- Additional electric heating option.
- Casteo-E for all-electric operation.





Comfortable warmth at any time, even independently of the central heating – Casteo is also available with additional electric heating or as Casteo-E for all-electric operation.



Clear lines, geometric shapes – Casteo brings form and colour to a room. Even functional components such as the optionally available valve shut-off block are elegantly adapted to the design.



Classy and practical: the ample spaces between the heating surfaces provide enough room to hang your bath and hand towels.



Technical information

Heights	987, 1261, 1535, 1809 mm
Lengths	500, 600, 750 mm
Depth	30 mm
Heat output 75/65-20 °C	438 - 1065 Watt

Casteo-D. Discover your bathroom with new eyes.

It is that easy and unproblematic to switch to modern and powerful bathroom heat.

Casteo-D. Distinct lines, pure aesthetics.

- Easy replacement thanks to connections that exactly match existing hub distances.
- Thermostatic head at user-friendly height.
- The numerous gaps provide convenient spaces for hanging up towels.
- Additional electric heating option.





Perfect switch: Casteo-D gives a completely new aesthetic touch to the room where there was an old standard radiator before. And provides comfortable heat just as you like it.

Fits perfectly: the hub distances of old DIN radiators and steel panel radiators fit the connections of the Casteo-D. You are thus able to comfortably switch to modern bathroom design without carrying out extensive renovation works and without changing the existing pipe connections.



Technical information

Heights	987, 1261, 1535, 1809 mm
Lengths	500, 600, 750 mm
Depth	30 mm
Heat output 75/65-20 °C	438 - 1065 Watt

Credo-Uno. Bathroom heat in its best form.

Top grade for design and price-performance ratio. And another top grade for the many possibilities to harmoniously integrate the radiator into your own bathroom.

Credo-Uno. Excellent in its class.

- Standard version with visible connections.
- Credo-Uno-V with integrated valve set and blinded 50-mm centre connection for complete planning freedom.
- Connection to Kermi x-net floor heating possible with the x-link connecting set.
- Version with additional electric heating.
- Credo-Uno-E for all-electric operation.
- Also available in chrome.





Credo-Uno Standard:
also available completely
in noble chrome.



In great shape down to the last detail: the valve version impresses with its completely covered connection technology and the perfectly integrated thermostatic head.



Clear design with individual freedom: for example with trendy colours from Kermi's innovative colour concept. Or with panels of contrasting colour, also in chrome.



For central-heating independent heat all-year-round: Credo-Uno for additional electric operation, and Credo-Uno-E for all-electric operation.



**x-link. The perfect combination
of heating design and floor heating.**

For Credo-Uno-V, Kermi offers the x-link connecting set for combination with the Kermi x-net floor heating system. It is directly installed on the radiator and covered completely with the panel. For perfectly controlled comfort without an objectionable connection box, without a power connection and extensive construction work.

Technical information	
Heights	789, 1169, 1473, 1777 mm
Lengths	490, 640, 790 mm
Depth Standard	35 mm
Depth Valve versions	41 mm
Heat output 75/65-20 °C	217 - 1223 Watt

Duett. Powerful heat output, great price-performance ratio.

Classic bathroom heat can be this good.

And at the same time equally efficient and affordable.

Duett. Classic bathroom heat with double power.

- Clear, classic, double-layered.
- Up to 65 % higher heat output compared to a standard bathroom radiator.
- Also suitable for low-temperature applications (e.g. heat pump).
- Easy-to-plan – with side or centre connections, respectively.
- Additional electric heating option.
- Duett-E for all-electric operation.



Comfortable heat and pleasantly warm towels at any time even in transitional seasons – Duett with additional electric heating makes it possible. The Duett-E for all-electric operation provides modern, efficient heat, completely independent of the central heating network.



With its double-layered construction, Duett provides heat output that is up to 65 % higher compared to a standard bathroom radiator.



Equipped with connections on the side and a 50-mm centre connection that is especially easy to plan and install.


Technical information	
Heights	1188, 1492, 1796 mm
Lengths	484, 634, 784, 934 mm
Depth	74 mm
Heat output 75/65-20 °C	834 - 2297 Watt

Duett-D. Easy replacement of radiators.

The quick, efficient replacement solution for an easy switch to a modern look and cosy towel comfort.

Duett-D. Switch easily to modern bathroom heating.

- Fast, economical replacement solution thanks to DIN hub distances.
- Clear and classic forms, double-layered.
- Up to 65 % higher heat output compared to a standard bathroom radiator.
- Also suitable for low-temperature applications (e.g. heat pump).
- Additional electric heating option.

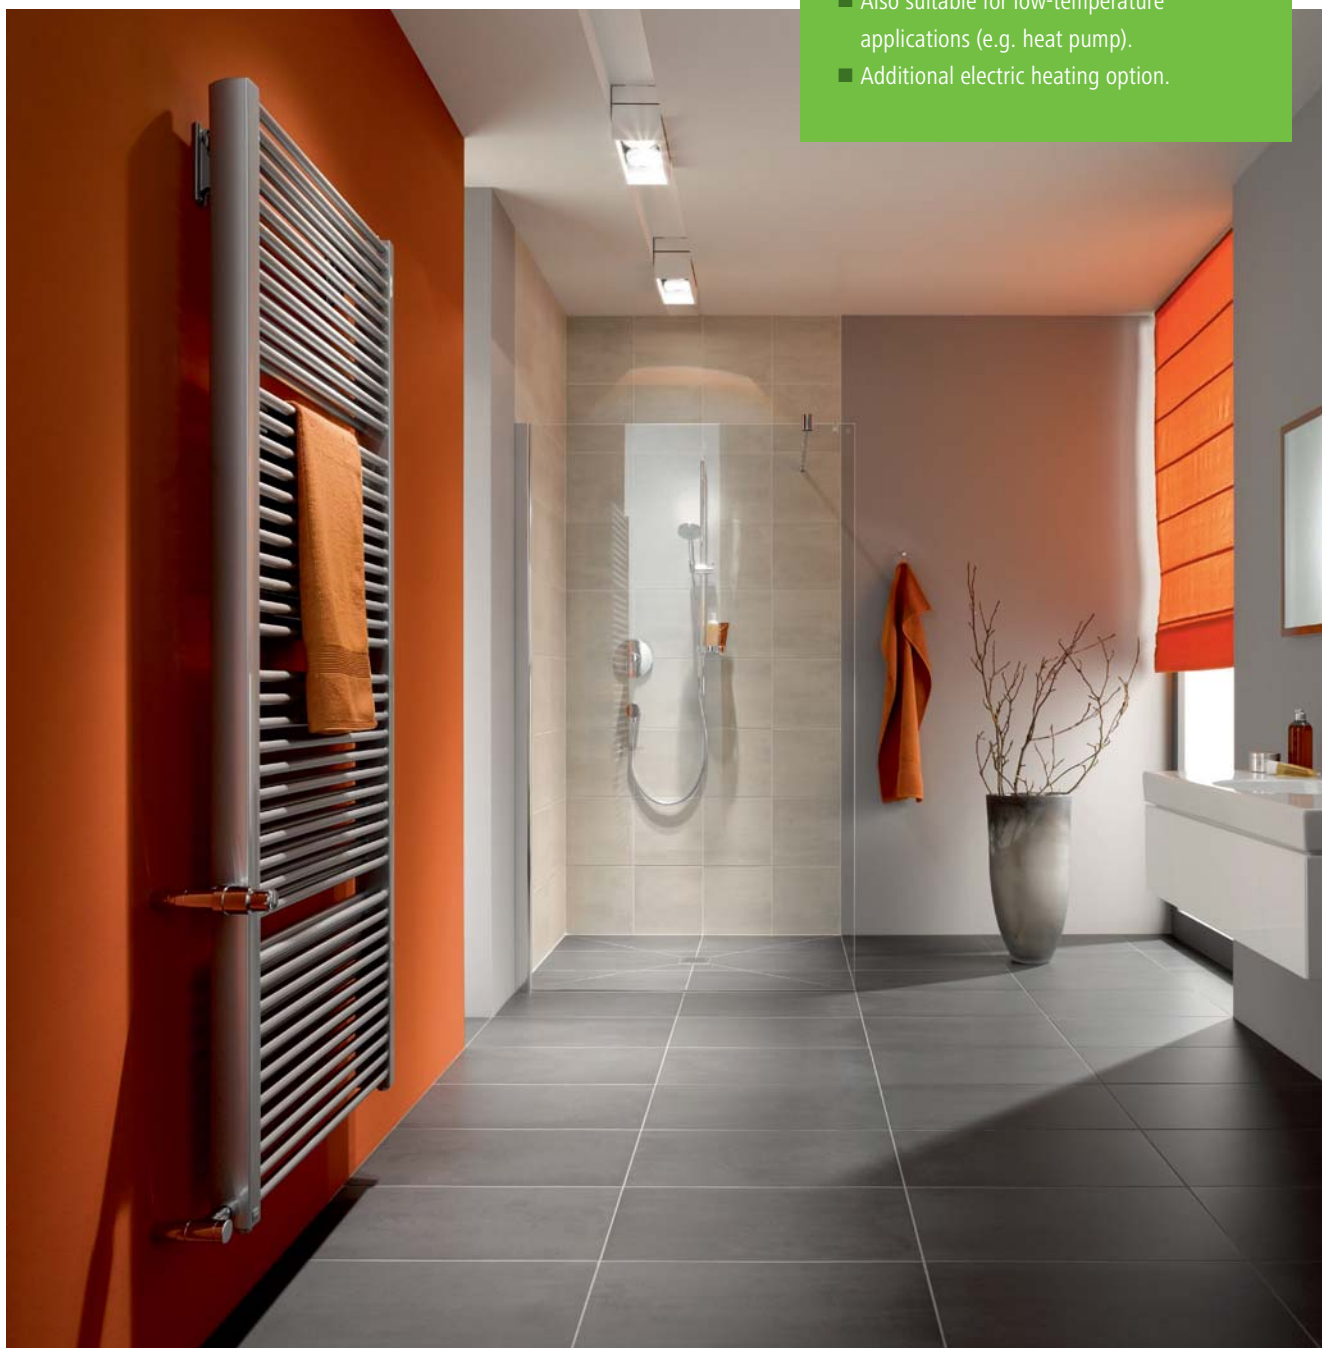



With the Duett-D, it is easy and unproblematic to switch to modern and powerful bathroom heat. Thanks to connections that exactly match the hub distances of the old radiators and steel panel radiators.

With its double-layered construction, Duett-D provides heat output that is up to 65% higher compared to a standard bathroom radiator.



Technical information	
Heights	1188, 1492, 1796 mm
Lengths	484, 634, 784, 934 mm
Depth	74 mm
Heat output 75/65-20 °C	834 - 2297 Watt

Geneo quadris. Combines modern shapes with practical details.

It will first win your heart and then convince your mind.



Striking appearance: the vertical manifold pipe and the trapezoidal cross pipes with their angular profile. Practical add-on: the surfaces of the transversal profiles are less dust-sensitive. Also available with a valve shut-off block that has been elegantly adapted to the design.


Geneo quadris. Surprising form, attractive appearance.

- Numerous spaces between the cross pipes provide room for your bath towels and hand towels.
- Maximum planning flexibility throughout, thanks to the 50-mm centre connection or side connections.
- Attractive price-performance ratio.
- Additional electric heating option.
- Available as Geneo quadris-E for all-electric operation.





Pleasantly warm bathrooms, even without a central heating system: the Geneo quadris with an additional electric heating option and the Geneo quadris-E for all-electric operation make it possible.

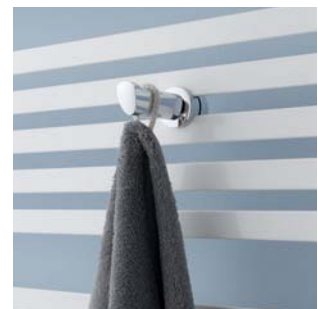

Comfort with elegance: with practical accessories that can be individually placed.



Technical information

Heights	814, 1174, 1494, 1774 mm
Lengths	447, 596, 746, 896 mm
Depth	32 mm
Heat output 75/65-20 °C	343 - 1453 Watt

Geneo circle. All the way perfect for your well-being.

The convincing combination of a lean form and exemplary performance.

Geneo circle. An all-round winner in terms of form, price and performance.

- Numerous spaces between the cross pipes provide room for bath towels and hand towels.
- Maximum planning flexibility throughout, thanks to the 50-mm centre connection or side connections.
- Attractive price-performance ratio.
- Additional electric heating option.
- Available as Geneo circle-E for all-electric operation.
- Also available in chrome.





Comfortable heat all year round, also independent of the central heating – no problem with the additional electric heating option or all-electric operation with the Geneo circle-E.



The easy-to-plan centre connection with an optionally available valve shut-off block is elegantly covered with a panel that perfectly matches the radiator's design.



Making practical things even more pleasant: individually placeable towel rails and hooks.



Technical information

Heights	810, 1190, 1494, 1798 mm
Lengths	431, 580, 730, 880 mm
Depth	40 mm
Heat output 75/65-20 °C	199 - 1491 Watt


Basic-50. Straight appearance with high-quality workmanship.

Very classy with straight cross pipes.

A real multi talent that looks good in every room.

Basic-50. As straightforward as it is high-quality.

- Vertical D-pipe profiles, straight cross pipes.
- Side or centred connection, respectively, available for complete planning freedom throughout.
- Also available with additional electric heating or all-electric operation.
- Also available in chrome.

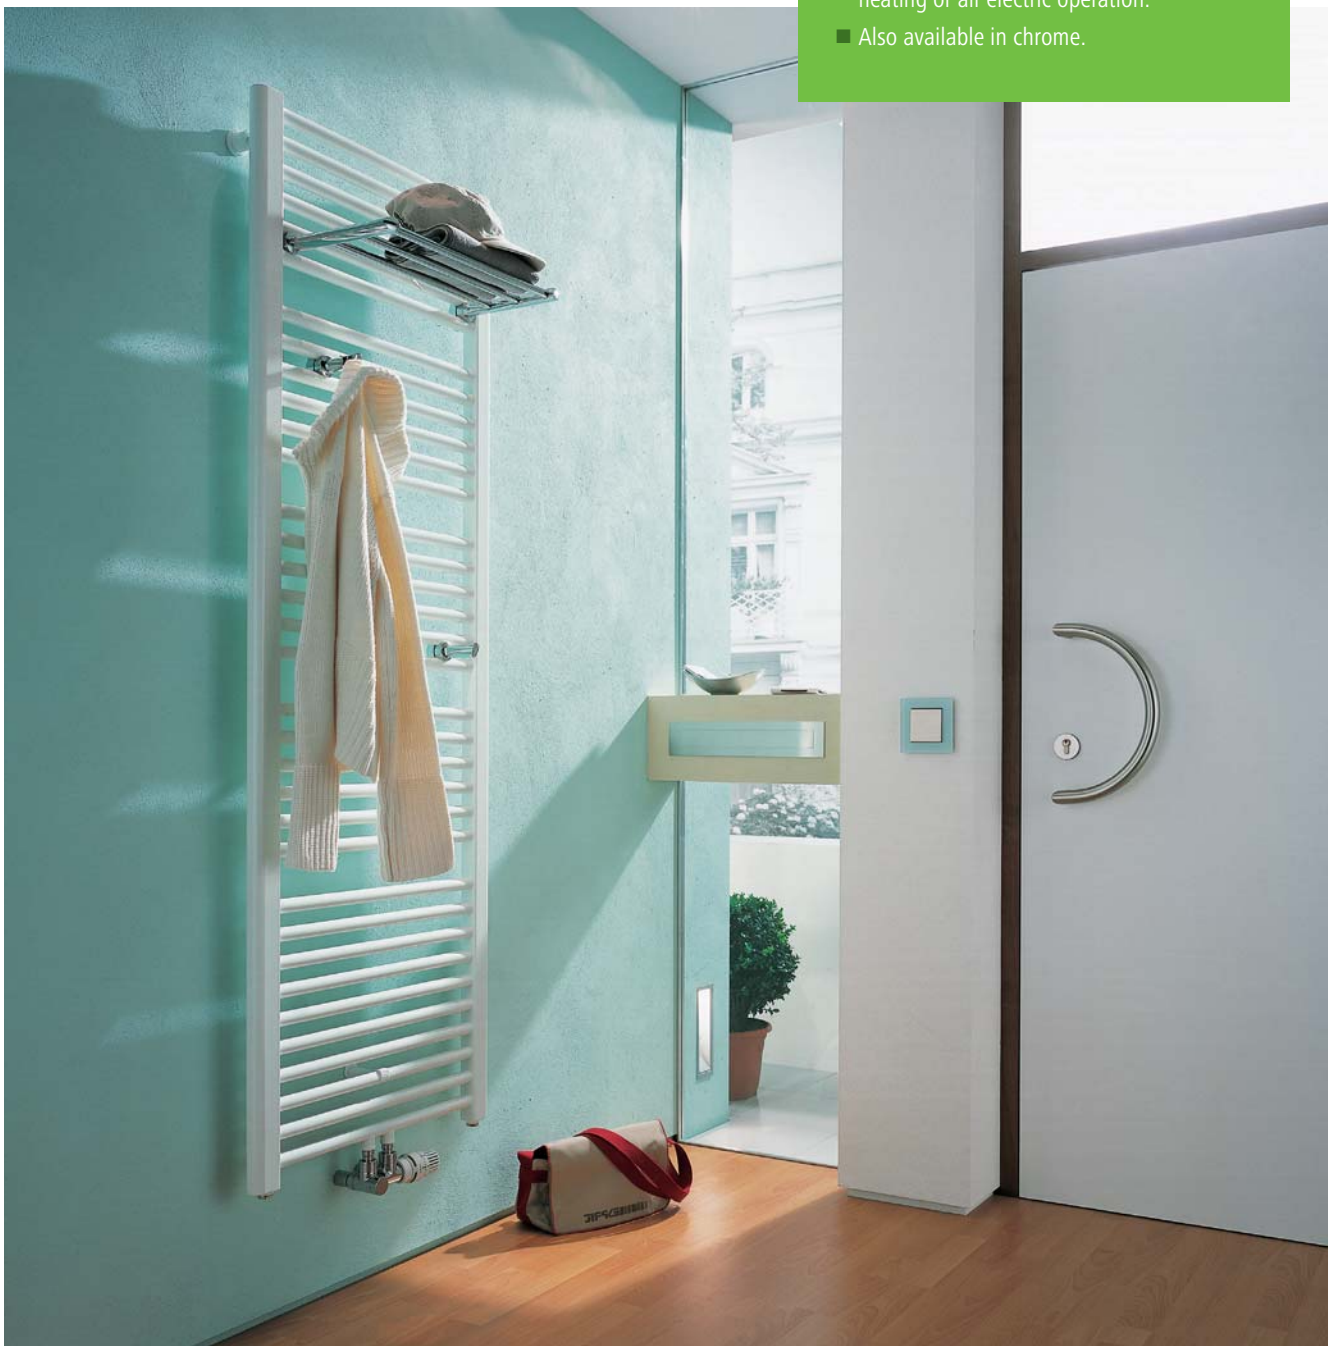



Straight and classy with a noble chrome surface.



Additional electric operation version: pleasant heat and towels that are always cosily warm even in transitional seasons.

All year round independent of the hot water central heating due to all-electric operation. A cost- and time-saving solution primarily for old buildings.



The Basic-50 is also available as special room divider version. The radiator thus becomes an appealing optical divider between bath and living rooms.



Technical information	
Heights	804, 1172, 1448, 1770 mm
Lengths	450, 599, 749, 899 mm
Depth	35 mm
Heat output 75/65-20 °C	241 - 1433 Watt

A wide selection of high-quality accessories turn the Basic-50 into an attractive eye-catcher with comfortable additional value.

Basic-50 R. Heat aesthetics with smooth dynamics.

The curved cross pipes add a special swing to every bathroom.



Heating elegance in a different way: the curved cross pipes provide the right temperature and more elegance.

Basic-50 R. Heat aesthetics with smooth dynamics.

- Vertical D-pipe profiles, curved cross pipes.
- Side or centred connection, respectively, available for complete planning freedom throughout.
- Also available with additional electric heating or all-electric operation.
- Also available in chrome.





Pleasant heat comfort even without central heating. A pleasantly heated bathroom is appreciated especially in spring and autumn. If at this point in time, the central heating has not yet been activated, the version with additional electric operation provides pleasant temperatures. And what if the building does not have a central heating system? Then, Basic R-E is your first choice. A cost- and time-saving solution primarily for old buildings.



The noble chrome surface finish makes the Basic-50 R a swinging bathroom highlight.

Technical information	
Heights	804, 1172, 1448, 1770 mm
Lengths	450, 599, 749, 899 mm
Depth	51, 60, 70, 73 mm
Heat output 75/65-20 °C	241 - 1433 Watt

Basic-D. Switch easily to modern bathroom heating.

Not only for the bathroom: replace radiators easily and install them using existing connections.

Basic-D. The very simple replacement solution.

- Vertical D-shaped pipe profiles, straight cross pipes.
- Simple replacement of old DIN radiators or steel panel radiators thanks to matching hub distances.
- No need to change pipe connections, no modifications.
- Also available in chrome.
- Also with additional electric operation.





Replaced overnight:
the Basic-D as brilliant
chrome version.



Plump and diagonal turned into lean and vertical. Overnight –
without dirt and alteration works.

Technical information


Heights	804, 1172, 1448, 1770 mm
Lengths	450, 599, 749, 899 mm
Depth	35 mm
Heat output 75/65-20 °C	241 - 1433 Watt

B20-S and B20-R. Straight or gently curved.

Attractive in heating efficiency, lean in appearance and price.

B20-S / B20-R. Slender heating - comfortably economical.

- Elegant D-pipe profiles and delicate cross pipes, optionally straight or slightly bent.
- Side or centred connection, for maximum planning and installation freedom.
- Additional electric heating option.
- Also available in chrome.

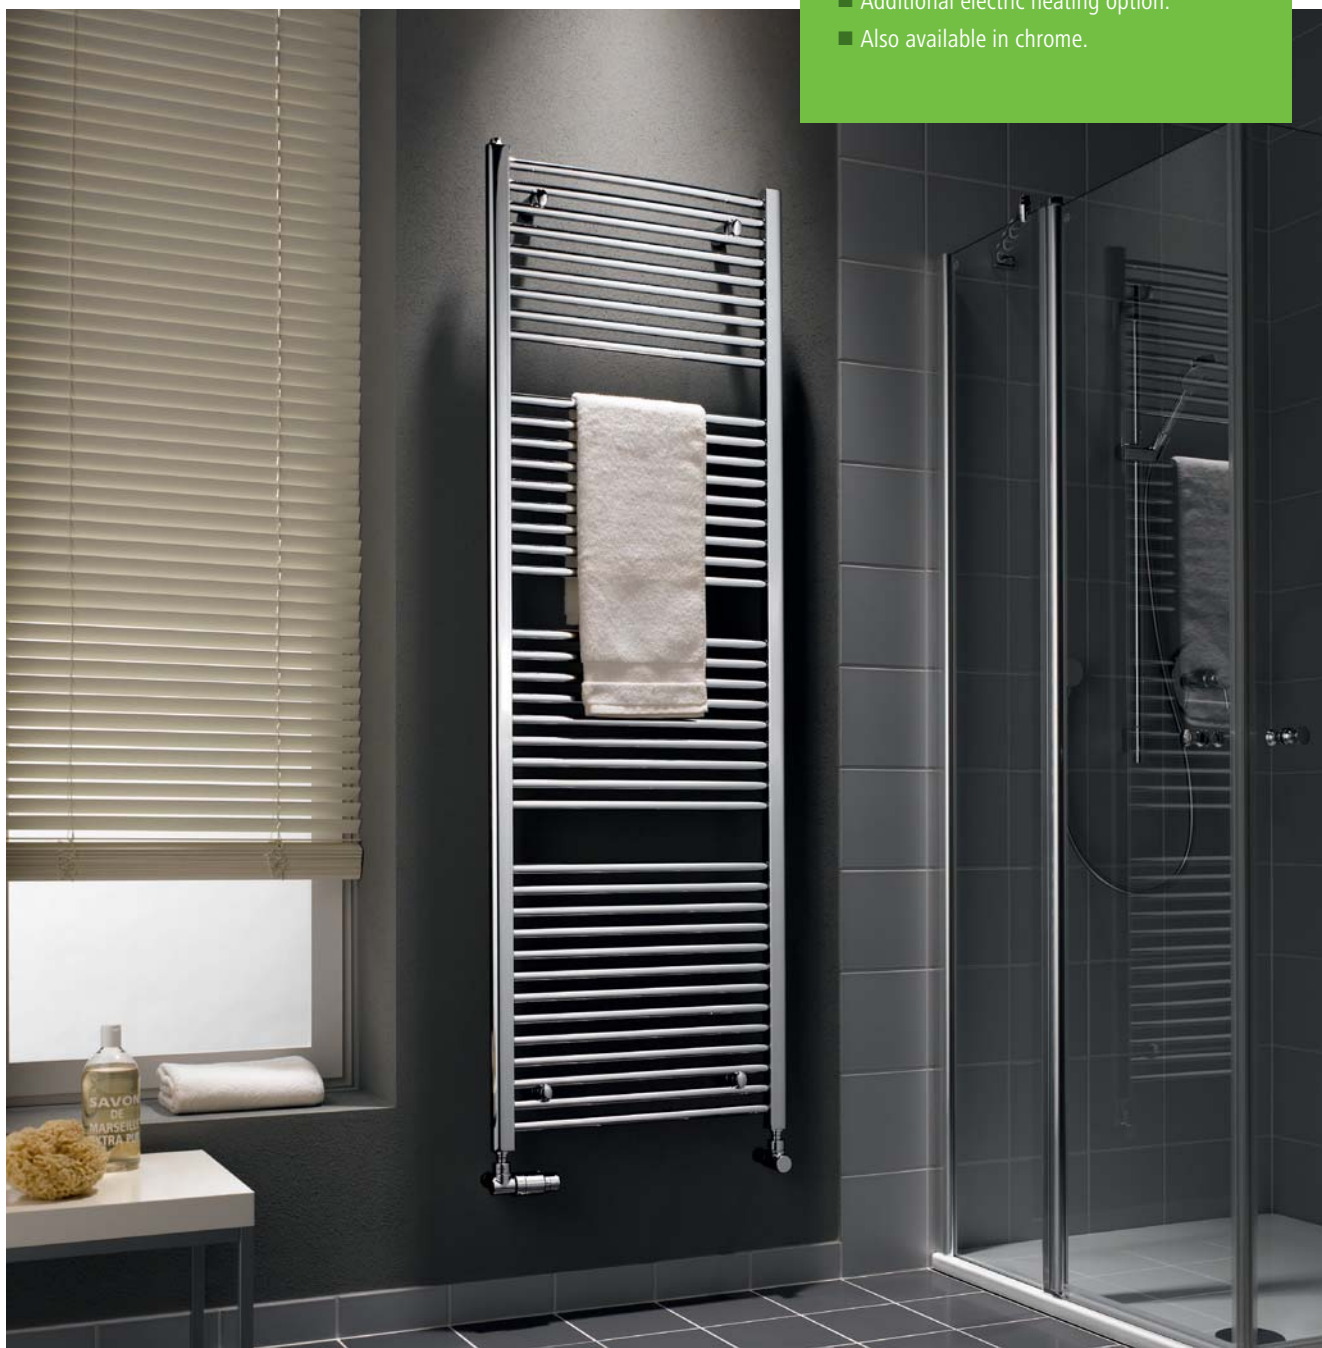

Gently curved cross pipes provide special dynamics and the larger distance to the wall ensures additional comfort by allowing an easy warming of towels etc.



Optimal planning and installation advantages due to the connection options, e.g. with a 50 mm centre connection.

Technical information


Heights	764, 1174, 1502, 1789 mm
Lengths	390, 440, 490, 540, 590, 740, 890 mm
Depth B20-S / B20-S M	32 mm
Depth B20-R / B20-R M	39, 47, 50, 55, 65, 68 mm
Heat output 75/65-20 °C	182 - 1346 Watt

Karotherm. Creative consequent, transparent.

Discover a new way of well-being: heat design with cult status.

Karotherm. Creative heat in the square.

- Vertical, horizontal or square version.
- Many connection options for maximum planning freedom.
- Attractive accessories like towel or hanger holders.
- Also available with additional electric heating or all-electric operation.

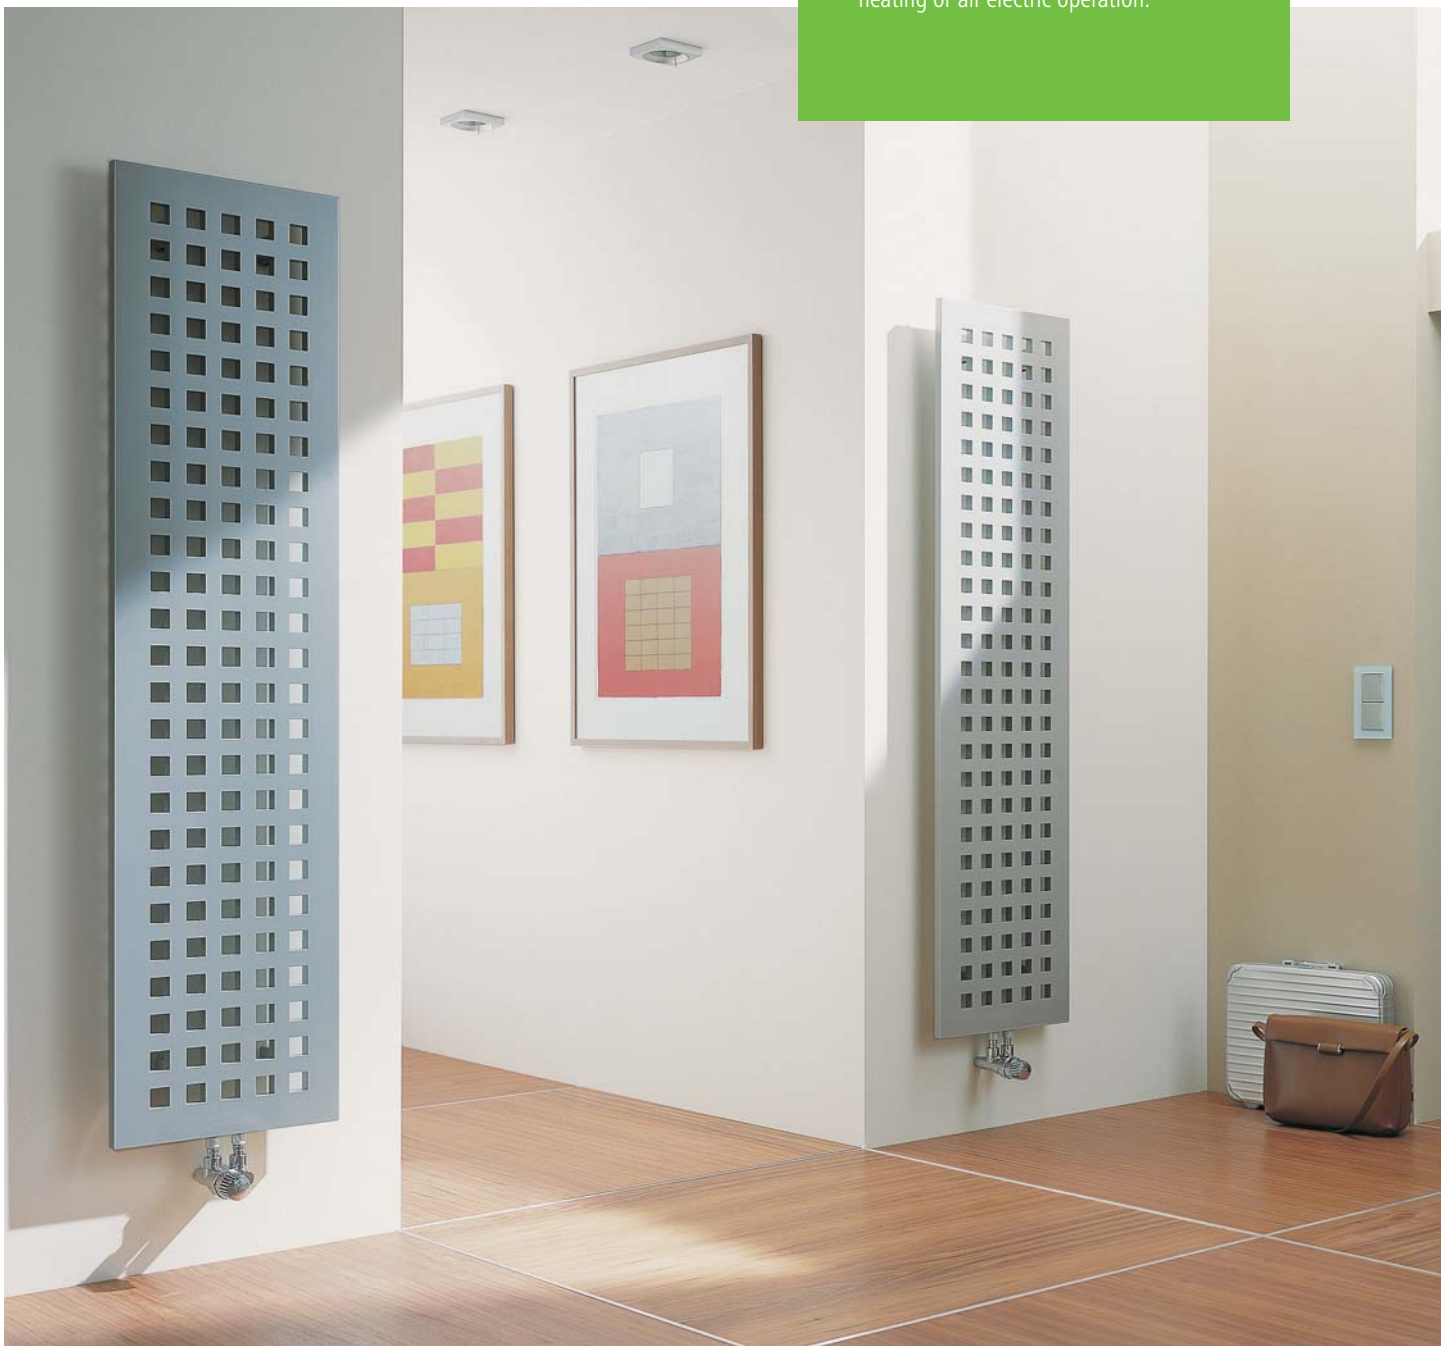



Independent of the central heating network: the Karotherm-E with all-electric operation. Or with additional electric operation for pleasant heat also in transitional seasons.

A new visual concept for heat: uniqueness square by square. Also as regards quality thanks to the complex production process with state-of-the-art laser welding technology.

Technical information	
Heights	300 - 2497 mm
Lengths	300 - 2497 mm
Depth	22 mm
Heat output 75/65-20 °C	105 - 2235 Watt

Pateo. As aesthetic as powerful.

Exemplary shape, performance and energy efficiency.

Pateo. Clear, powerful, efficient.

- Extensive, timeless design with smooth transitions.
- High heat output for highest heat requirements.
- Also ideally suitable for low system temperatures, e.g. heat pumps.
- Highest energy efficiency due to unique x2 technology.





The clear and extensive design with a smooth transition between the front and side panel sets its own trends for interior design.



Individual adaptation by means of flexible connection options. For example with centre connection as an easy-to-plan solution with high flexibility throughout.



Comfort with add-on: the streamlined optional towel rail is individually adjustable in height.

Technical information	
Heights	1525, 1725, 1925 mm
Lengths	500, 600, 700 mm
Depth	66 mm
Heat output 75/65-20 °C	1056 - 1808 Watt


Rubeo. Pure aesthetics with clear, minimalist design line.

Passionately uncomplicated in form and function.

Pleasantly unobtrusive in comfort.

Rubeo. A clear statement to clear lines.

- Clear contours and strictly reduced lines.
- High heat output for highest heat requirements.
- Also ideally suitable for low system temperatures (e.g. heat pump)
- Highest energy efficiency due to unique x2 technology.
- With optional towel rail for additional comfort.

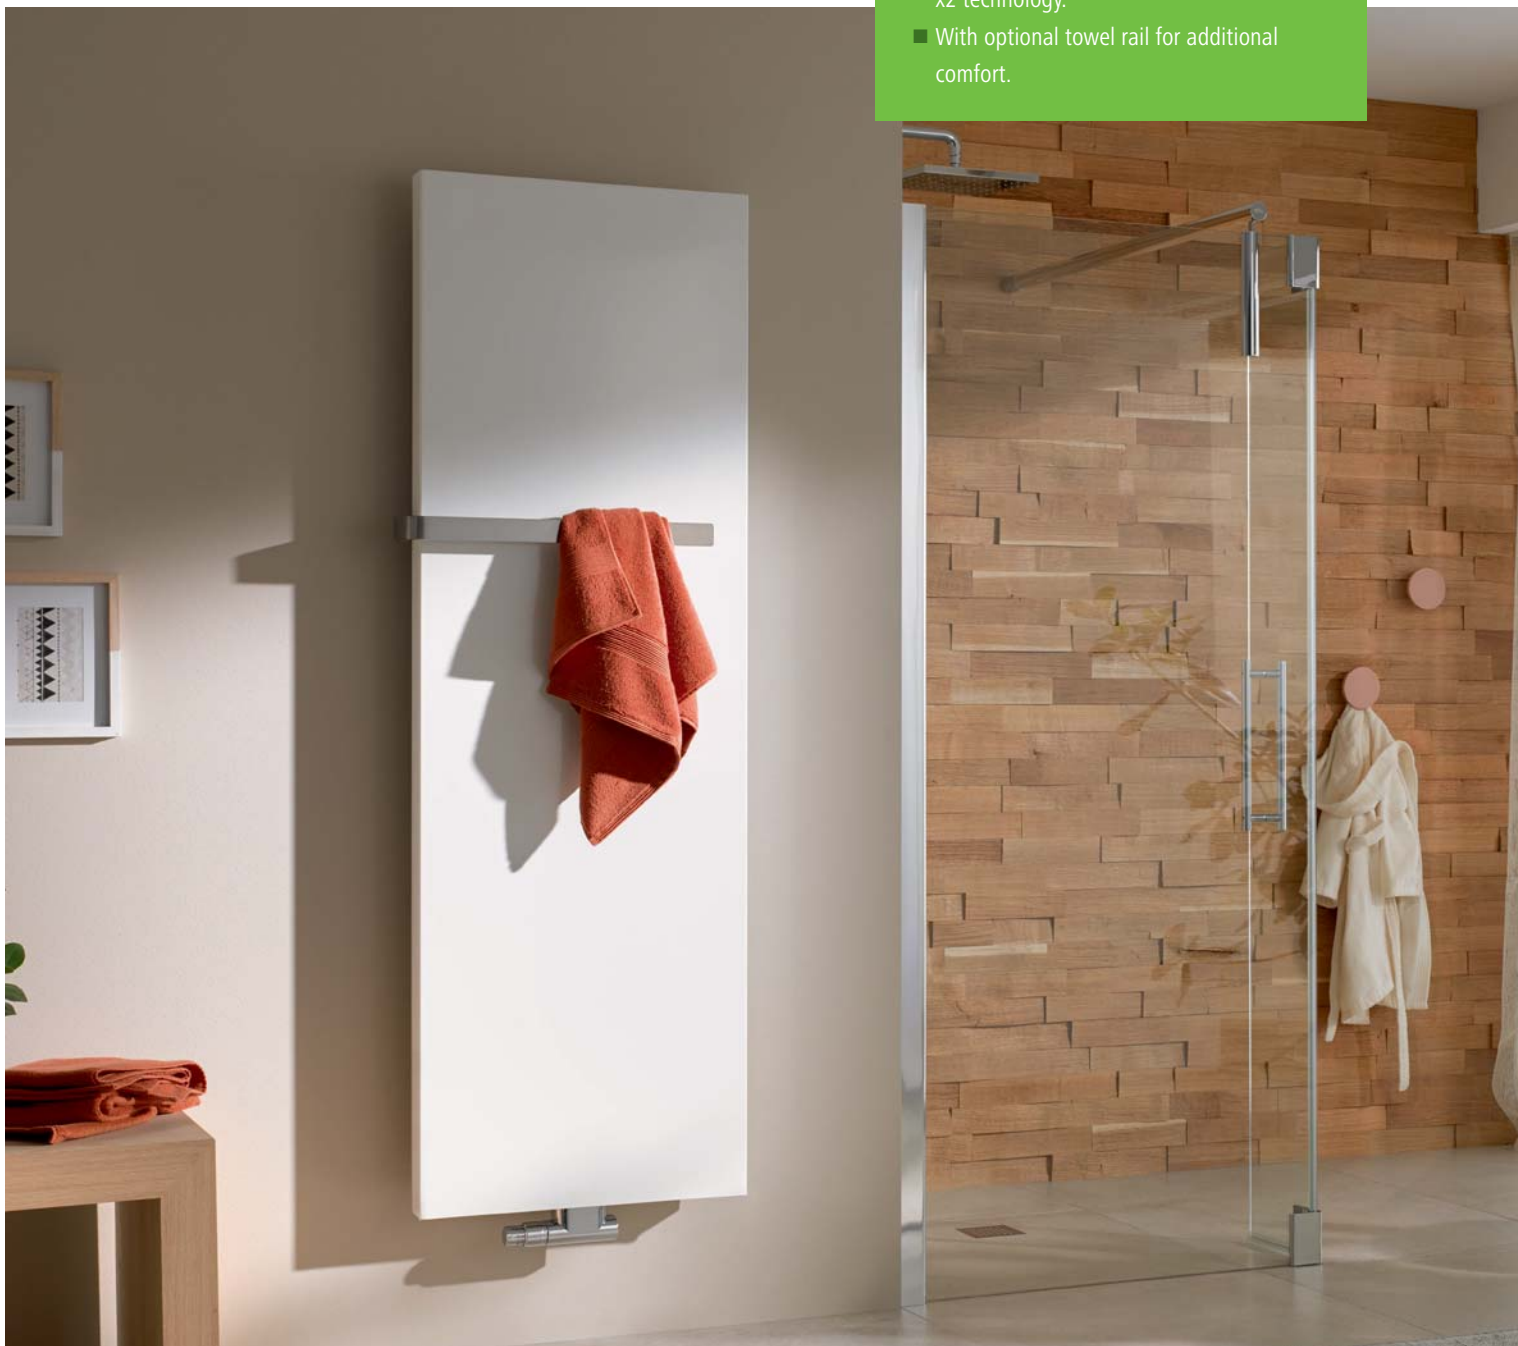



Maximum planning flexibility throughout thanks to 50-mm centre connection.



Consequents line: the Rubeo fits perfectly the the look of a modern bathroom thanks to its clear shapes.



Pleasantly warmed towels: the streamlined optional towel rail is individually adjustable in height.




Technical information	
Heights	1525, 1725, 1925 mm
Lengths	470, 570, 670 mm
Depth	66 mm
Heat output 75/65-20 °C	1056 - 1808 Watt

Kermi Decor. Great in terms of form, workmanship and functionality.

Aesthetic, appealing, expressive: this is how good heat comfort looks today.

Kermi Decor. Trend-setting round pipe design.

- Maximum flexibility during planning and installation due to side connections or, respectively, 50-mm bottom connections in the centre, on the left or on the right side.
- Dimensioning and heat output fantastically variable.
- Optimal suited for all living areas.
- Upon request, also available for additional electric heating or all-electric operation.

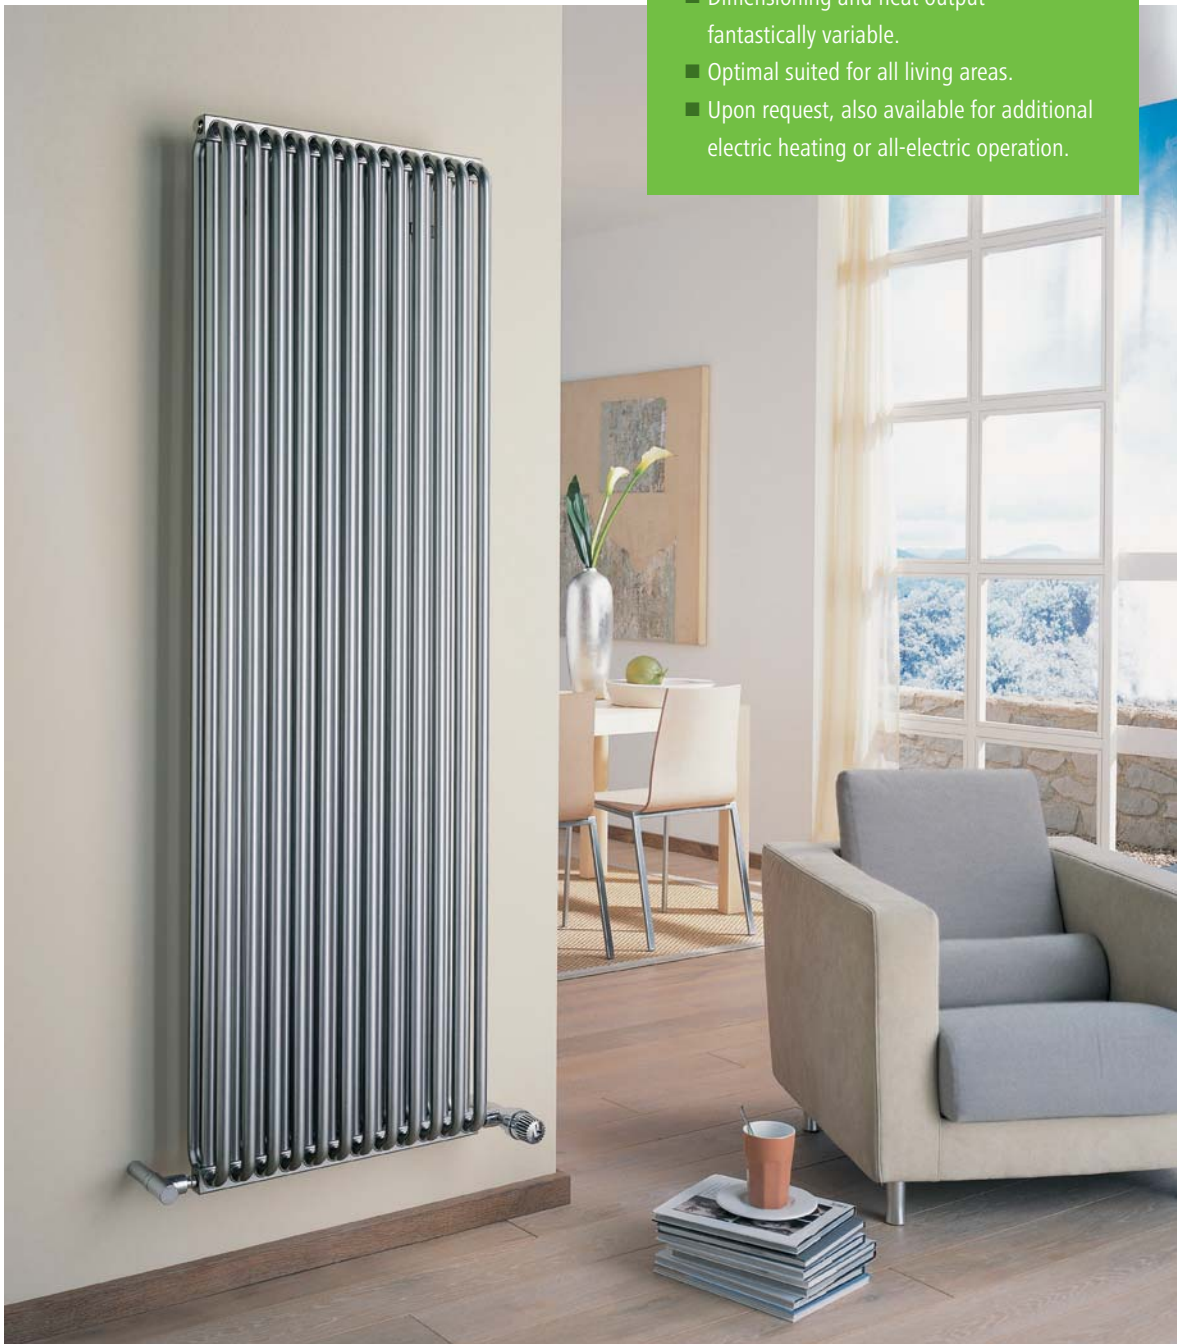



Round pipe radiator design in its most precious form. Dimensioning and heat output fantastically variable. Optimal suited for all living areas. High-quality accessories establish order and always provide for e.g. warm towels.



Kermi Decor-V with integrated valve and 50-mm centre connection for a maximum of planning flexibility. 50 mm connection also possible on the bottom right / left.

Kermi Decor-S with side connections. Dimensioning and heat output fantastically variable.



Technical information	
Heights	200 – 2000 mm
Lengths	184 - 2944 mm
Depth	32 - 277 mm
Heat output 75/65-20 °C	73 - 4268 Watt

Kermi Decor-D. Modern heat overnight.


It is that easy to bring modern heat comfort into your own four walls.

Kermi Decor-D.

Replacement made easy.

- For fast, uncomplicated replacement of old DIN radiators and Kermi steel panel radiators.
- No need to change pipe connections, no conversion work.
- Innovative design.
- Energy-saving technology.
- Partially also available for additional electric operation.



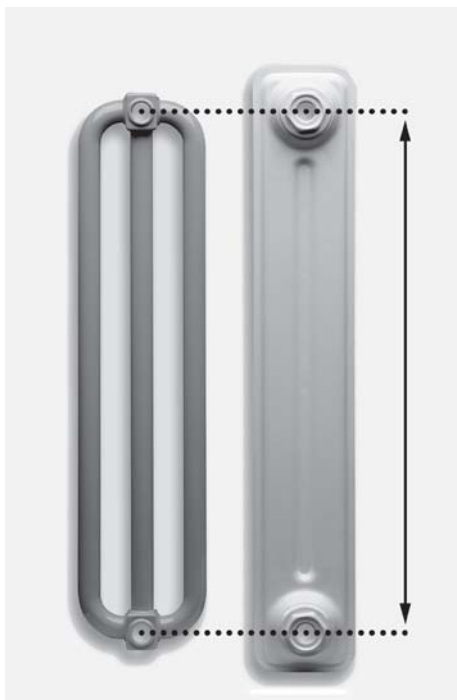

Switch easily and quickly to modern energy savings technology. Thanks to matching hub distances of old DIN radiators or steel panel radiators.



Easily and quickly to modern, attractive, powerful heating design. Without dirt and extensive alteration works.

Technical information	
Heights	238 – 1038 mm
Lengths	184 - 2944 mm
Depth	32 - 277 mm
Heat output 75/65-20 °C	45 - 9728 Watt

Design radiator product overview



Ideos

Height: 758 - 1901 mm
Height: 508, 758 mm
Heat output: 262 - 963 Watt



Tabeo

Height: 1197 - 1757 mm
Length: 500, 600, 750 mm
Heat output: 646 - 1266 Watt



Credo-Duo

Height: 1091 - 1889 mm
Length: 471, 621, 771 mm
Heat output: 619 - 1827 Watt




Credo-Half

Height: 1086 - 1884 mm
Length: 460, 610 mm
Heat output: 277 - 1051 Watt



Icaro

Height: 1446, 1866 mm
Length: 400, 600 mm
Heat output: 311 - 804 Watt

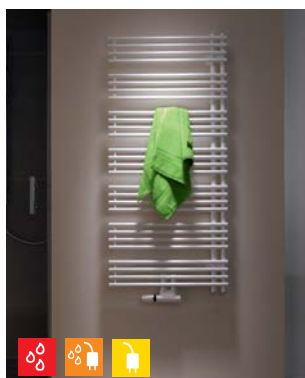


Diveo

Height: 940 - 1700 mm
Length: 450, 600 mm
Heat output: 244 - 940 Watt



Credo

Height: 1091 - 1892 mm
Length: 471, 621, 771 mm
Heat output: 422 - 1240 Watt

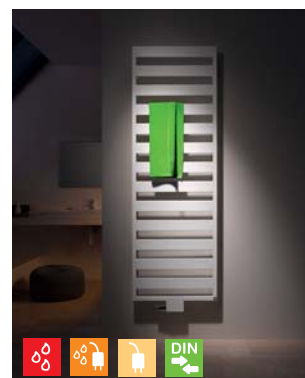

Casteo

Height: 987 - 1809 mm
Length: 500, 600, 750 mm
Heat output: 438 - 1065 Watt



Credo-Uno

Height: 789 - 1777 mm
Length: 490, 640, 790 mm
Heat output: 217 - 1223 Watt



Duett

Height: 1188 - 1796 mm
Length: 484, 634, 784, 934 mm
Heat output: 834 - 2297 Watt



Geneo quadris

Height: 814 - 1774 mm
Length: 447, 596, 746, 896 mm
Heat output: 343 - 1453 Watt



Geneo circle

Height: 810 - 1798 mm
Length: 431, 580, 730, 880 mm
Heat output: 199 - 1491 Watt


Basic-50

Height: 804 - 1770 mm
Length: 450, 599, 749, 899 mm
Heat output: 241 - 1433 Watt


Basic-50 R

Height: 804 - 1770 mm
Length: 450, 599, 749, 899 mm
Heat output: 241 - 1433 Watt


B20-S / B20-R

Height: 751 - 1777 mm
Length: 390, 440, 490, 540, 590, 740, 890 mm
Heat output: 178 - 1398 Watt


Karo therm

Height: 300 - 2497 mm
Length: 300 - 2497 mm
Heat output: 105 - 2235 Watt


Pateo

Height: 1525 - 1925 mm
Length: 500, 600, 700 mm
Heat output: 1056 - 1808 Watt


Rubeo

Height: 1525 - 1925 mm
Length: 470, 570, 670 mm
Heat output: 1056 - 1808 Watt


Kermi Decor

Height: 200 - 2000 mm
Length: 184 - 2944 mm
Heat output: 73 - 4268 Watt



Hot water operation. Classic connection of the radiator to the central heating network of the house. For quick, efficient heat supply.



Additional electric operation. Can be operated via the central heating or independent thereof. Ideal in transitional seasons.



All-electric operation. Comfortable heat completely without central heating. The perfect solution wherever there is no central heating.



Replacement radiator. Fit exactly on the hub distances of old DIN radiators. Replacement without dirt and extensive alteration works.




x-link. Optically and technically convincing connection solution for floor heating directly on the radiator. Without extensive construction measures.

Design radiator accessories overview

Ideos				
		Towel hook, chromed	Towel rail, chromed	Towel ring, chromed
Credo-Duo				
		Towel hook, chromed	Towel rail, chromed	Towel rail, open, chromed
Credo-Half				
				Towel hook, chromed
Credo				
		Towel hook, chromed	Towel rail, chromed	Towel rail, open, chromed
Credo-Uno				
		Towel hook, chromed	Towel rail, chromed	
Duett				
		Towel hook, aluminium paint, chromed	Towel rail, aluminium paint, chromed	

Geneo
quadris



Geneo
circle



Towel hook, aluminium paint, chromed



Towel rail, aluminium paint, chromed

Basic-50



Towel hook, aluminium paint, chromed



Towel rail, aluminium paint, chromed *



Towel shelf, aluminium paint, chromed *

Karotherm



Hanger holder, chromed



Towel rail, chromed

Pateo



Towel rail

Rubeo



Towel rail

Kermi Decor



Towel hook, aluminium paint, chromed



Towel rail, aluminium paint, chromed




Towel shelf, aluminium paint, chromed


* (only Basic-50/-D)

What you should know.

Valuable information and tips for the right heating decision according to your individual needs.

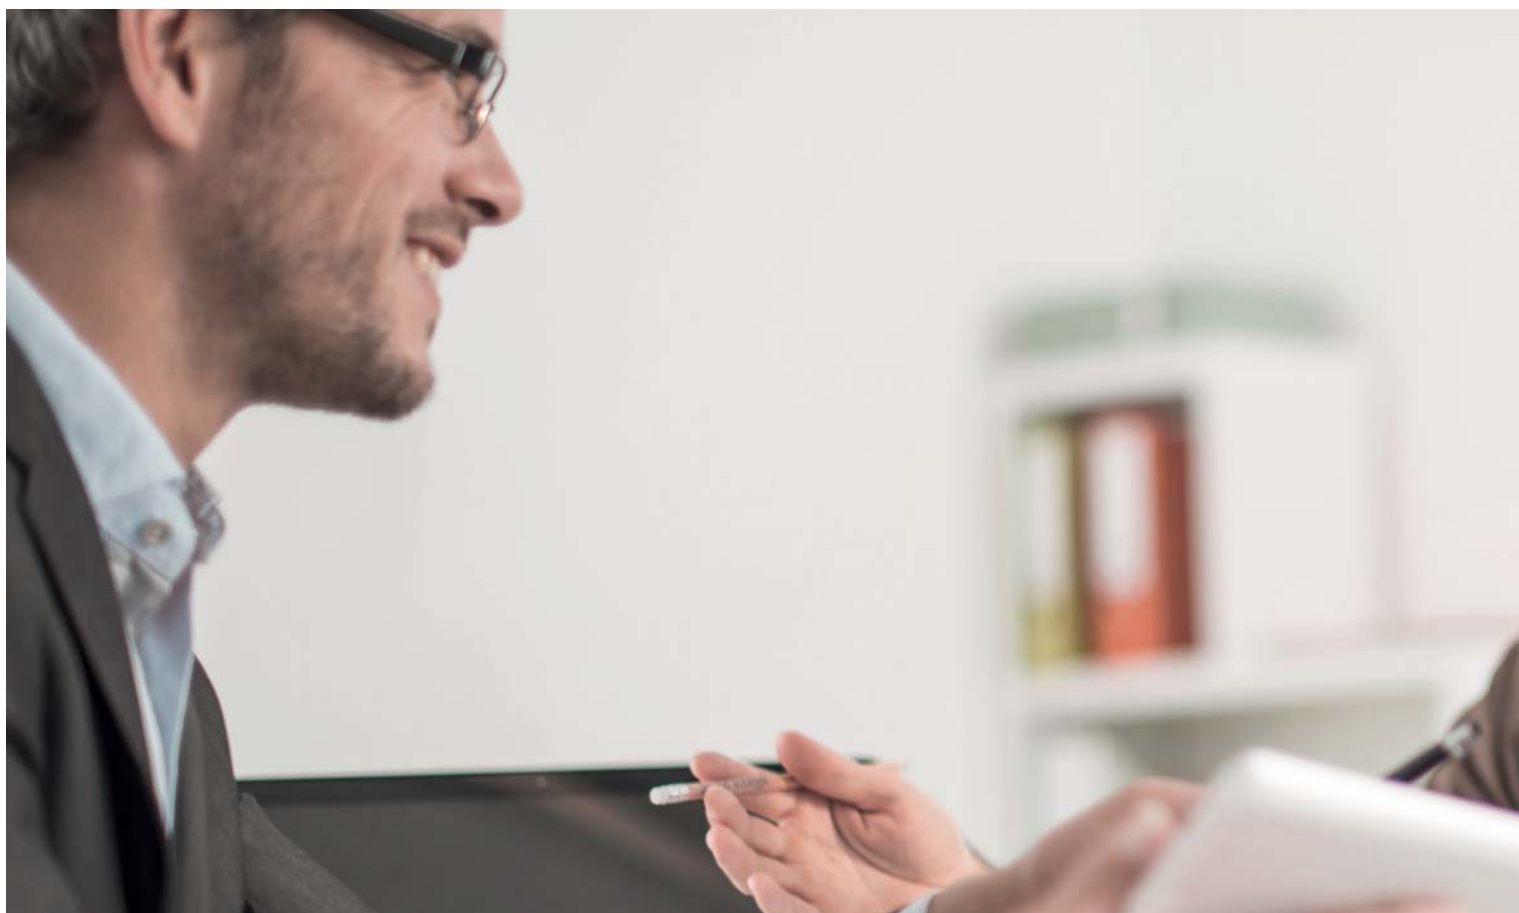

Comfort for all senses needs more than only temperature. For example, the question regarding the individual alignment to room dimensions and different use: towel warming or complete fulfillment of the heat requirement? A completely hidden or openly visible connection? Standard connection or additional electric or all-electric operation, respectively. New building or renovation? Simple heat output or comfortable multi-functionality. On the following pages, we would like to give you an understanding of important design and technology criteria. Afterwards, you will already be on your way to find your very own solution for your well-being. Your qualified heating and sanitary expert will provide you with technical details. And he will also take care of the proper dimensioning, planning and installation in a professional manner. For modern heat in its most precious form, appealing to body and sight.

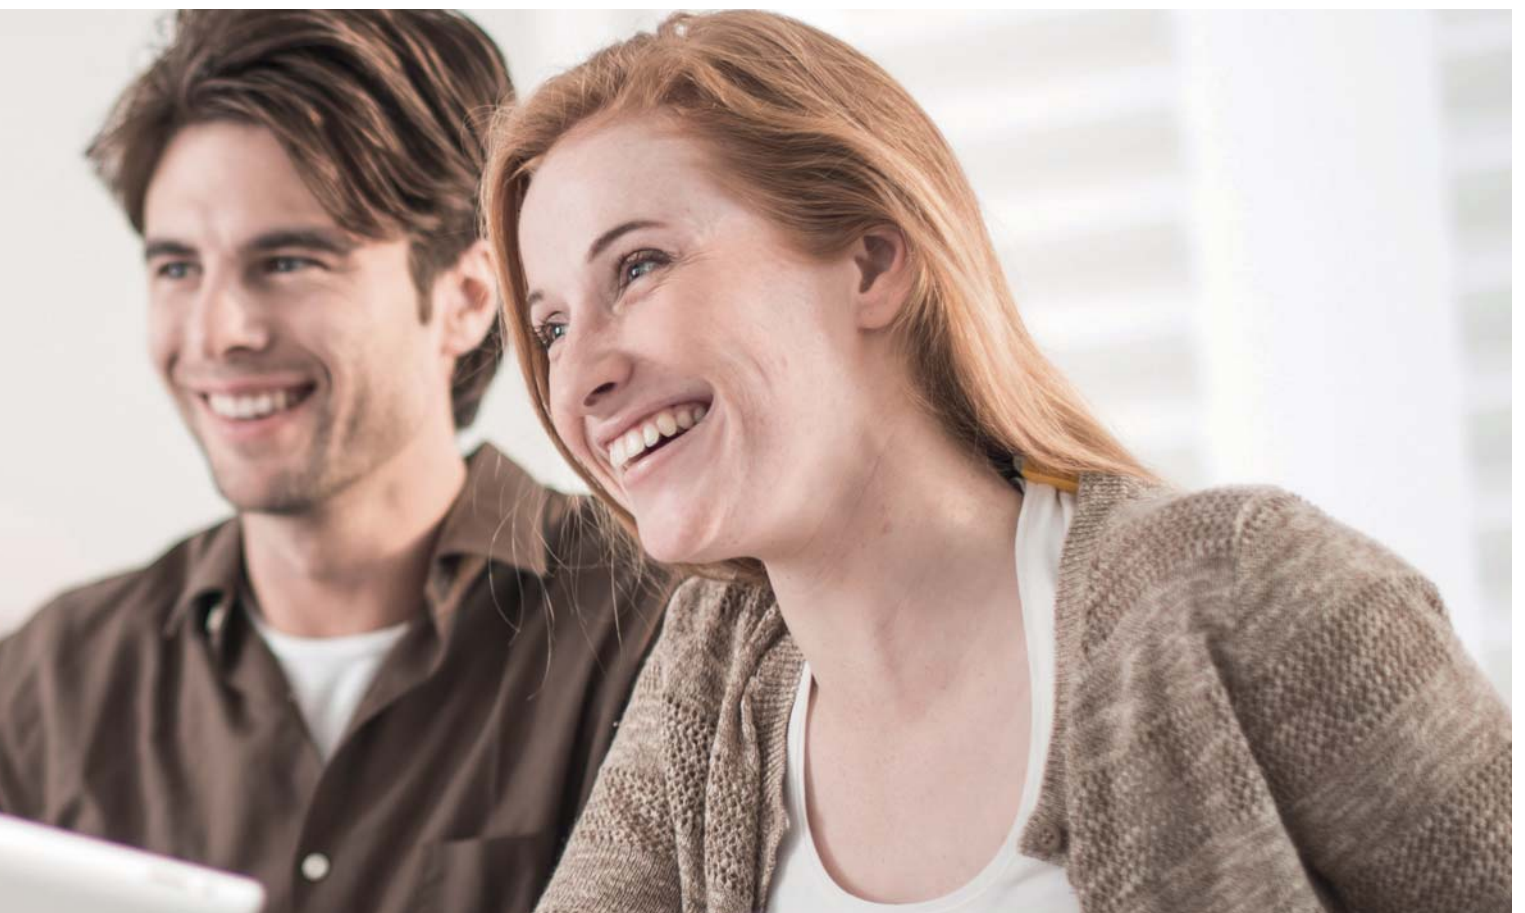

The correct heat output.

What do you expect from the radiator: cover the room's heat requirement or be a mere towel warmer?

This question of principle is decisive when you have to choose a model.

This is the simple formula: the larger the radiator surface, the greater the heat output – certainly always in connection with the room size. If a high heat requirement has to be covered, large-surface or double-layer models, respectively, such as Credo-Duo, Duett or Kermi Decor are your first choice. When you want primarily warm towels, each Kermi design radiator is a perfect butler and a source of heat. Good to know: To always keep an eye on heating costs, all Kermi V models are delivered with a pre-set valve insert. For efficient energy savings control.





Soiled radiators reduce the heat output and favour the spreading of house dust mites. Special cleaning brushes for Kermi design radiators comfortably reach every spot and reliably take up dirt and dust.



Easy and quick to find the right radiator: The Kermi Quickfinder allows you to reliably determine the room heat requirement – www.kermi.de/quickfinder



Connection possibilities and radiator position.

No bathroom is like the other. Therefore, Kermi design radiators offer maximum installation flexibility.

The connection. Completely hidden or openly visible connection.

Kermi has created a uniform 50-mm centre connection standard that provides you with complete planning and decision freedom throughout. The optical and technical differences offer you additional comfort and more options: thus, e.g. for all valve versions (except Kermi Decor-V), the connection situation is completely hidden underneath a panel. Absolutely harmonious and consistently. In case of the Fedon model, not even a thermostatic head is visible. But also the classic version, the left and right side connection is still possible for many models. Partially completely blinded.





The proper installation extent for an harmonious appearance.

Besides the minimum distance of 150 mm between the lower edge of the radiator and the floor, also the closing height is decisive for a harmonious appearance. For this the radiator may be aligned e.g. with the top edge of the shower enclosure, the mirror cabinet or the door frame. If there are no respective reference lines in the direct vicinity, an adequate solution is to position the radiator centrally and oriented towards the room height. What's important: functional aspects such as comfortable access to the towel.

x-link. The perfect combination of heating design and floor heating.

For Tabeo-V, Credo-V, Credo-Duo and Credo-Uno-V, Kermi offers the x-link connection set for combination with the Kermi x-net floor heating system. It is directly installed on the radiator and covered completely with the panel. For perfectly controlled comfort without an objectionable connection box, without a power connection and extensive construction work.



Pleasant heat whenever needed. Additional electric heating or all-electric operation.

Comfortable heat in the bathroom – this is perfectly achievable even without being connected to a central heating network. Either with additional electric or all-electric operation.

Your uncomplicated option for completely independent heat. For standard connection to the central heating, the additional electric operation is added to most versions as an option for well-tempered heat also in the transitional season and for towels that are always dry and comfortably warm. Or the version for all-electric operation, completely independent from the central heating network. Equipped with latest, user-friendly control technology.

Electrical set FKS. Simply set the desired room temperature on the control directly at the radiator and the electronically controlled heating rod ensures pleasant warmth.

Electrical set WKS. The external remote control is connected to the heating rod by a cable flush-mounted and can be positioned at a convenient height.

Electrical set WFS. The wireless solution permits placement of the control unit anywhere in the room. Simple setting of the room temperature or towel heating function. Especially suitable for renovations.

Electrical set WFC. The daily room temperature or the towel warming function can be set conveniently on the LCD screen. Energy-saving, convenient heating thanks to intelligent control.



Additional electric operation.

As an option for pleasant warmth also in the transitional season and for towels that are always nicely dry and comfortably warm.

All-electric operation.

Completely independent of a central heating network. A cost- and time-saving solution primarily for old buildings.



Easy replacement during renovation.

Whether a completely new bathroom or just a new radiator – Kermi makes it easy for you to achieve maximum effect with minimum effort.

Simple replacement against modern energy savings technology and attractive design. The biggest energy saving reserves can be found in heating and hot water generation. And in a new ambience, the old radiators quickly become foreign objects. Apart from that, a modern heat generator can only show its full potential if the radiator cooperates as well.

Kermi makes it easy for you and offers four special design radiator models for a clean and quick exchange: Kermi Decor-D for the living area and Casteo-D, Duett-D or Basic-D, respectively, especially for bathroom renovations (see also page 60 or 32, 38, 48).

For a quick and uncomplicated replacement – without extensive breaking or demolition works.





Replacement radiators by Kermi also convince with their operating comfort: e.g. with a thermostatic head at a user-friendly height.



Perfect for renovations.
x-net C15 thin-layer system and x-link connection set.

For a rational, subsequent laying of floor heating as part of a modernisation, Kermi offers the x-net C15 thin layer system. Additionally, and in combination with Tabeo-V, Credo-V, Credo-Duo and Credo-Uno-V, the x-link special floor heating connection set. It is installed directly on the radiator, invisibly and mounted underneath the panel. Without an objectionable connection box and extensive construction works.




Towel heating. Accessories.


A radiator is only a radiator? Not at Kermi. Towel warmers and accessories from Kermi are the perfect match for bathrooms and lavatories, but also for entrance halls, kitchens and living rooms. With straightforward design and their clearly distinguishable functionality, they bring pleasant comfort into your home.



Do you want to warm your towels directly on or in front of the radiator?

Towels that are always pleasantly warm – a comfort that is a matter of course at Kermi. You can decide yourself, what this will look like. In a classic way for warming the towels directly on the radiator pipes? Open forms for conveniently sliding in towels from the side? Or with one of the elegant versions from the Kermi accessories programme. Here, the warming is not done on but in front of the radiator. The difference: warming your towels directly on the radiator limits the heat emission into the room somewhat whereas the solution in front of the radiator does not influence the heat emission.

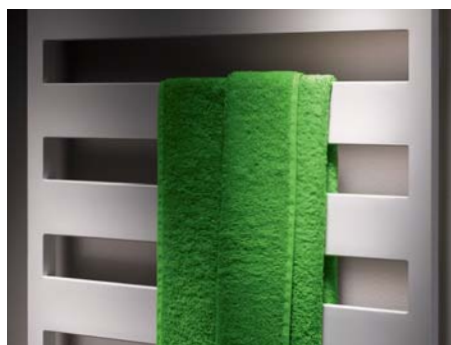

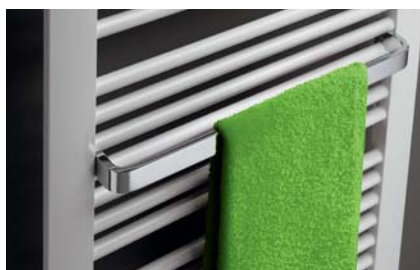

Attractive accessories turn Kermi design radiators into multi-functional objects.


Kermi design radiators are elegantly supplemented by an attractive accessories programme. Brackets, hooks and shelves in different forms and high-quality surface versions do not only shine because of their appearance but they also keep their optical promises. For comfortable order in the bathroom, entrance hall, kitchen and lavatory.

Noble heating aesthetics with exclusive charisma.

Bring your own personal style to your bathroom – with the high-quality Edition Chrome or with appealingly attractive colour combinations.

Edition Chrom. Brilliance for a discerning ambience.

In the version with elegant chrome surface finish that Kermi provides for the models Credo-Half, Icaro, Diveo, Credo-Uno, Geneo circle, Basic-50, Basic-50 R, Basic-D and B20, Kermi design radiators become luxuriant highlights that create a sophisticated ambience in every setting. Straight and classic or dynamically curved. Modern style, with solid brilliance or in stunning contrast to the distinctive panel design. And besides a connection to the central heating system, they are also available for additional electric heating or for all-electric operation.

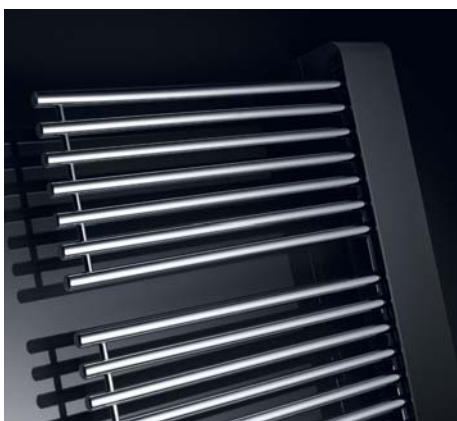



Colour combinations. Apply interesting colour accents or perfectly match the radiator to the interior design.
















For the Credo-Half and Credo-Uno models, Kermi provides an interesting and elegant colour concept combining two colours or metallic colours from the extensive Kermi colour concept. For attractive accents and perfect integration into the room.




Fresh colours for the heating world.

The innovative coating and colour concept. Keeping with current trends.

Standard colour	Sanitary colours		
			
white, RAL 9016	pure white, RAL 9010	manhattan	Aegean
			
	bahama beige	pergamon	black

Special editions					
 Edition Soft A luxury satin surface finish with a silky soft effect.					
	white, RAL 9016 Soft	pure white, RAL 9010 Soft	manhattan Soft	Aegean Soft	bahama beige Soft
					
	pergamon Soft	black Soft			
 Edition Nature The fundamental colours of nature. Fresh and expressive.					
	citrus Nature	olive Nature	corn Nature	purple Nature	crocus Nature
					
	lavender Nature				


Anticorrosive coating

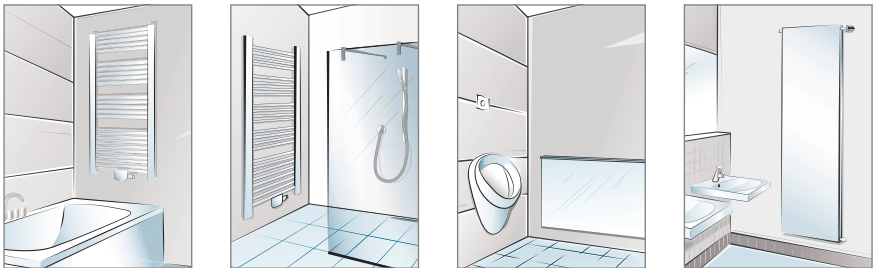


The new anticorrosive coating from Kermi is ideal for areas, which need more protection from damp and moisture. The painting is possible in any colour, for sure in well-known high Kermi quality.



Edition Ethno
In demand as never before: The warm, strong colours of exotic cultures.



solaris Ethno



inca Ethno



carmina Ethno



terra Ethno

Paint finish in any RAL CLASSIC colour also possible.

Special editions:
Please specify edition and colour when ordering.

Example order:
purple colour,
Edition Nature.



Edition Metallic
The glamorous retro styling of the '50s. Classically interpreted in shining metallic tones.




graphite Metallic




gloss silver Metallic



heliosgold Metallic



circonsilver Metallic



matt bronze Metallic



classic copper Metallic

Colour deviations are unavoidable for technical reasons related to printing.

Edition Chrome



chrome*

* Only for Credo-Half (radiator), Icaro, Diveo, Credo-Uno, Genéo circle, Basic-50, Basic-50 R, Basic-D and B20.



x-change
heat pumps



x-buffer
heat storage



x-center controls



x-net panel heating/
cooling



therm-x2
steel panel radiators



Design radiators



Heating wall



Convector



Kermi Decor



Wet floor system



Shower enclosure

Healthy, comfortable heat and unlimited showering comfort with the comprehensive Kermi heating technology and sanitary product ranges.

You can find additional information on www.kermi.com



Kermi GmbH
Pankofen-Bahnhof 1
94447 Plattling
GERMANY

Phone: +49 9931 501-0
Fax: +49 9931 3075
www.kermi.com
info@kermi.com